


tutorial

gunsan

eu size 32 - 60

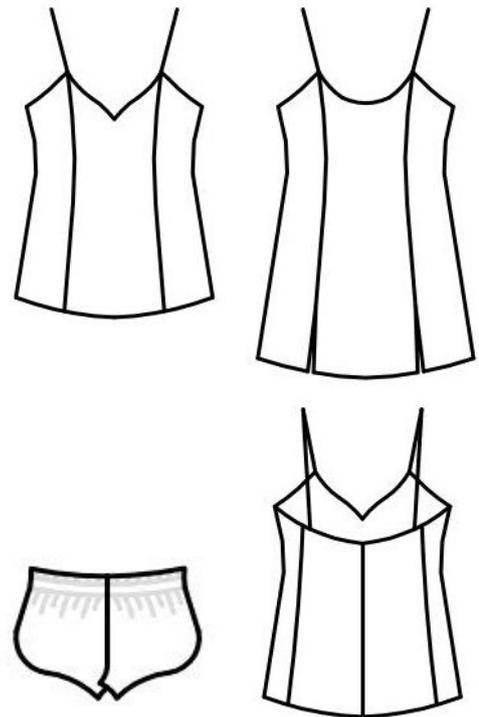

This pattern has different variations.
Seam/hem allowance is not included.

information

SALES LICENSE

Included with the patterns is a sales license. That means that you as individual who sews as a hobby or owns a business have the right to use the patterns to sell clothes. The license applies only for the buyer of the pattern and the license terms cannot be transferred to a third party. Which means that you cannot let another physical or legal person produce clothes on a large scale on your behalf.

SEAM ALLOWANCE/HEM NOT INCLUDED

You should add seam allowance on ALL patterns except where you intend to add binding or if the patterns says otherwise. I recommend that you read through the sewing instructions. Within it are instructions both in picture and text which will facilitate your sewing.

PAPER PATTERN

The paper patterns are sensitive to moisture and tear. Handle with care. On certain paper patterns the parts are split due to lack of space. Read the instructions carefully to know if they are to be stenciled and put together in a certain way. [When you sell your pattern, you must destroy all copies that you have made.](#)

PDF-PATTERN

Files are downloaded directly from your page on Etsy – after purchase they will be added to “purchases”. They are PDF-files and I recommend a pdf-reader with a setting to switch to “real size” and “automatic portrait/landscape” when printing. For example, Adobe Reader or PDF X-change. It is important to measure the control box so that it is exactly 30mm * 30mm or your garment might not end up the way you imagine. PDF is easy to print. Utilize the layers to only print the page you want to sew and cut it directly. There are arrows on the pattern and they should align towards each other when you put the pattern together. There is also an overview of the pattern where you can see how the different pages should be positioned.

Because a PDF-pattern is a digital product there are no refunds or returns.

[The PDF-Pattern may not be copied and/or sold/donated to a third party.](#)

LICENSE

When you purchase a pattern, you agree to an agreement with Sewingheartdesign that you accept the license with its terms and conditions. Violation of this agreement will be brought before the Swedish court.

I hope you will be satisfied with the pattern! Good luck with the sewing!

/Marie Sidén

Sewingheartdesign

fabric requirement

Fabric required is calculated with pre-washed fabric, 160 cm with, seam allowance included (1 cm) and hem (3 cm)

BODY LENGTH 150/170/190 cm

<u>SIZE</u>	<u>SHORT</u>	<u>LONG</u>
32-34	65/70/70 cm	75/80/85 cm
36-60	115/120/125 cm	120/130/140 cm

pages

SEAM/HEM ALLOWANCE NOT INCLUDED.

Choose your body length on the pattern.
Choose to bind or hem the legs.

CAMISOLE	p 4
SHOULDER STRAPS	p 6
LACE	p 11
PANTIES	p 15

camisole

SEAM ALLOWANCE/HEM NOT INCLUDED.


Choose your body length on the pattern.



Back, 2 pcs



Side, back, 2 pcs



Side, front, 2 pcs



Front, place on fold

Cut the parts. Add seam/hem allowance.



Sew the parts in the side seams.

Fold / band edge at the top and bottom.



Put the elastics straight towards the right and sew around. Fold the elastics to the wrong side and sew a decorative stitch to hold it in place.

shoulder straps



Measure out the shoulder straps and sew in the tip of the front piece.



Align the shoulder straps on the back cover and sew.


Adjustable shoulder strap: Put a ring on a ribbon, making a loop and attach to the back edge. Follow the instructions above but thread the strap in the ring and a slit. Sew around the sledge.



Band Edge from one tip up around the neckline and up to the next tip.



The edge band is sewn according to the table plus a little extra before it is sewn onto the tip, around the back, up on the next tip and further according to the dimensions of the table.

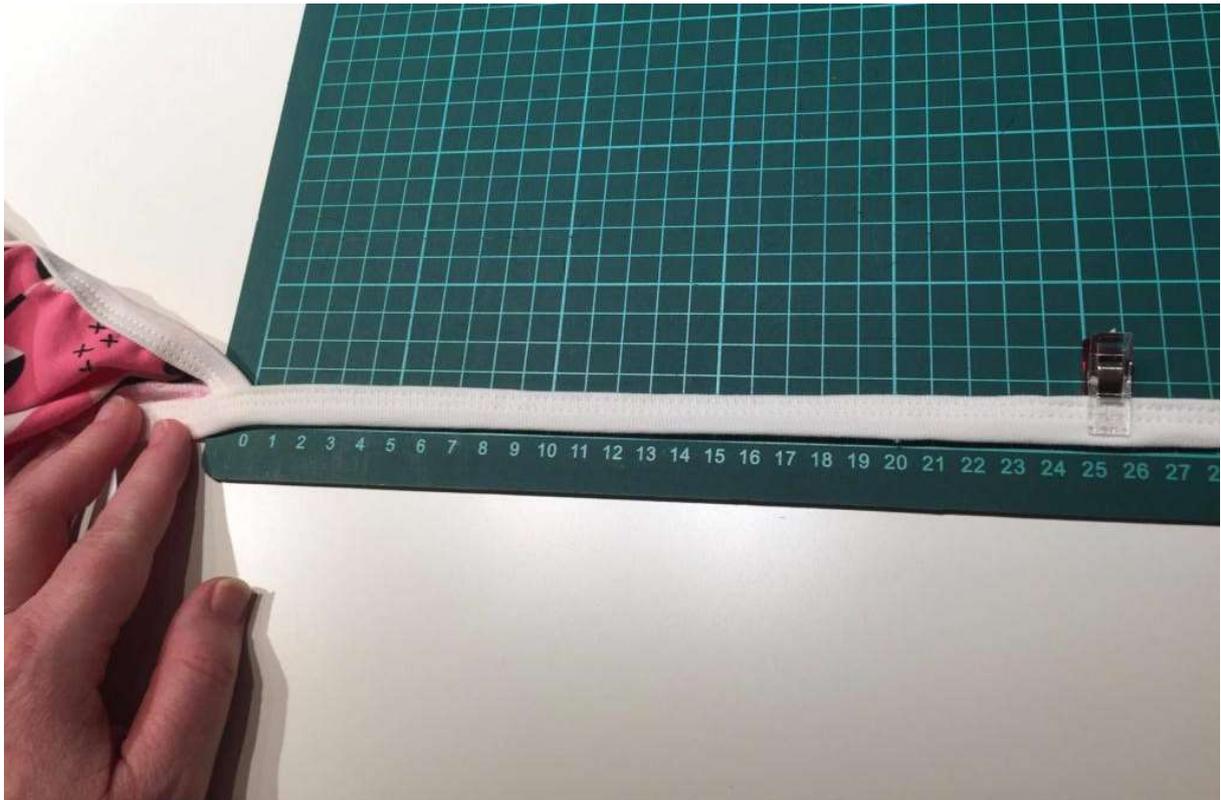

Measure how long the shoulder straps should be and set a marking.



Pin the back cover.




Sew a seam straight over the edge band.




Cut off the overflow.

lace


Try add lace top or bottom. Divide the pattern parts by placing the lace on the pattern and drawing new lines. Add seam allowance to the new pattern parts.

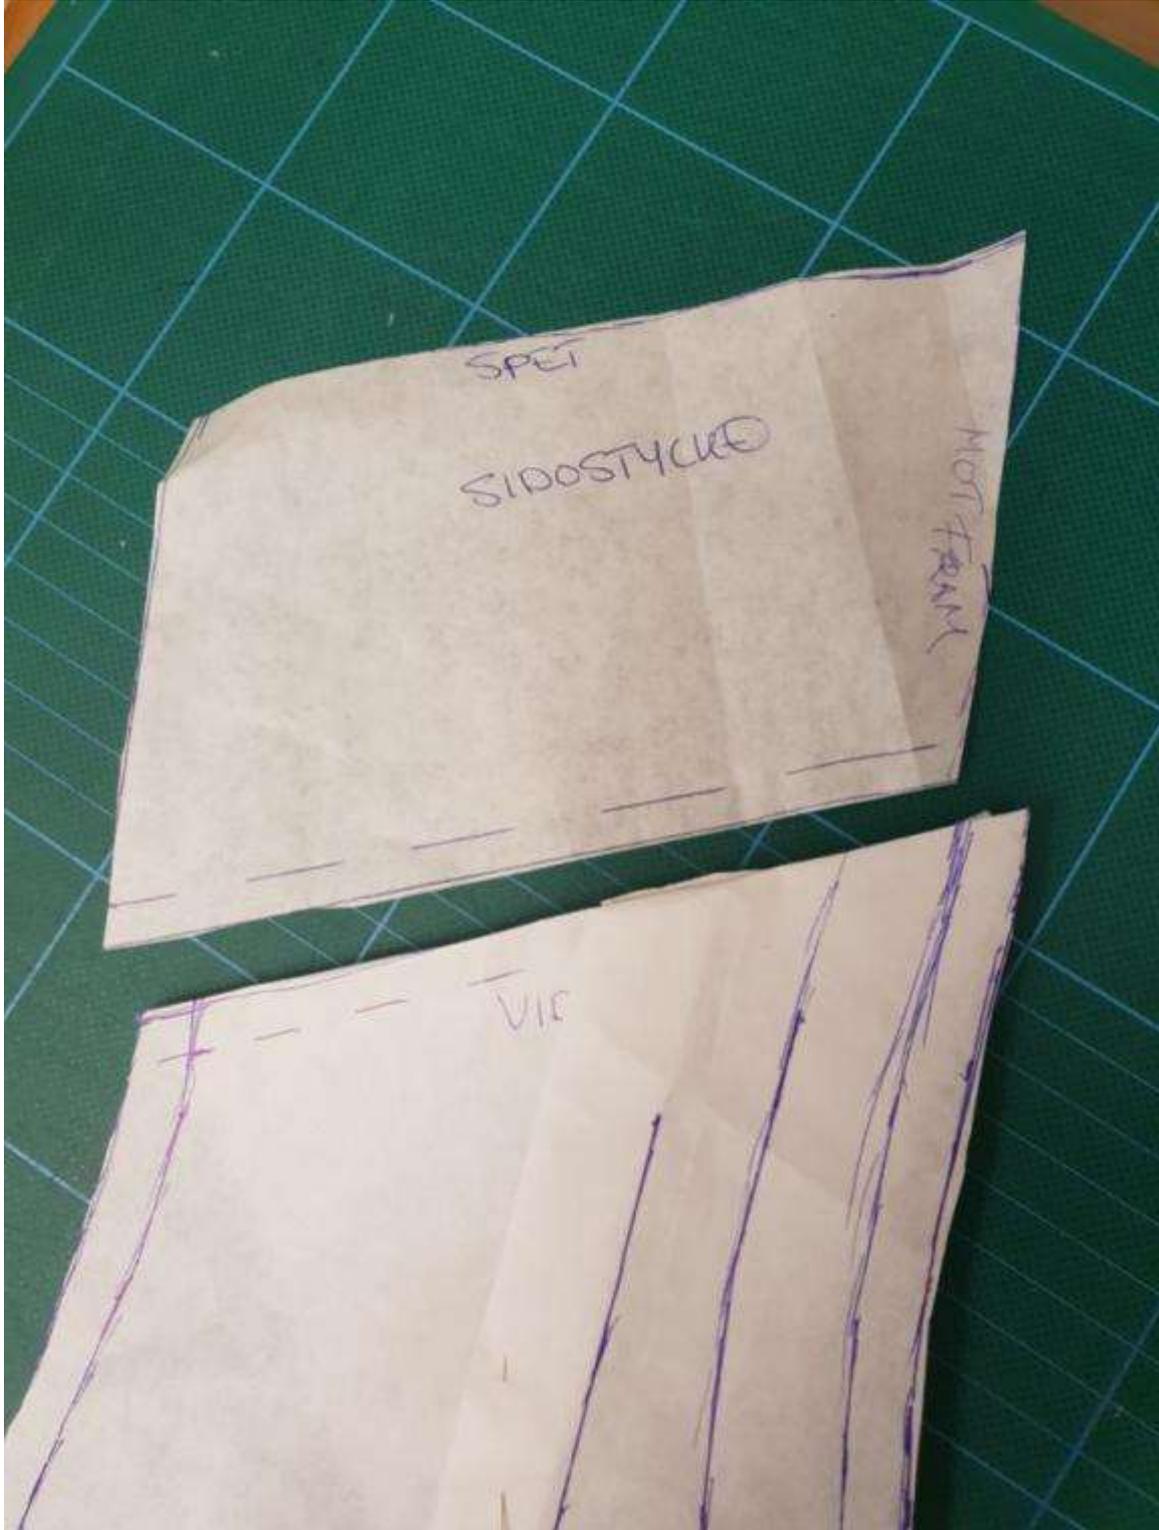


Split the pattern pieces and add seam allowance.

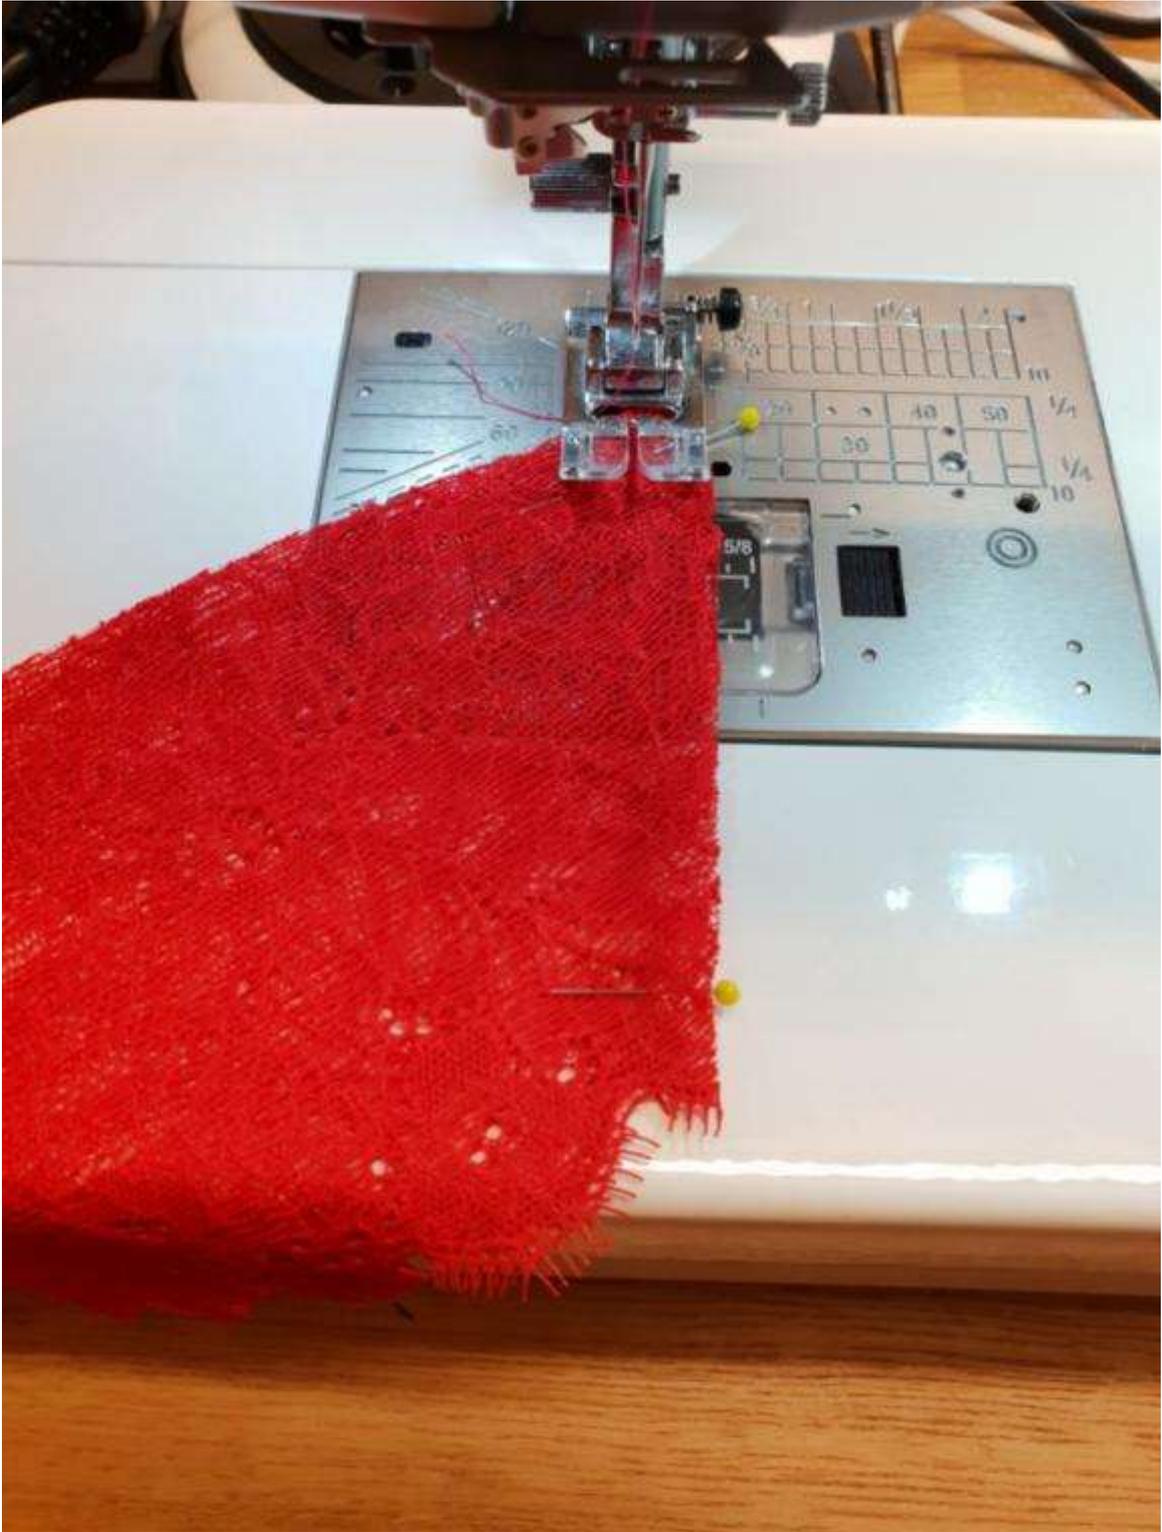

Sew the side seams on the lace.

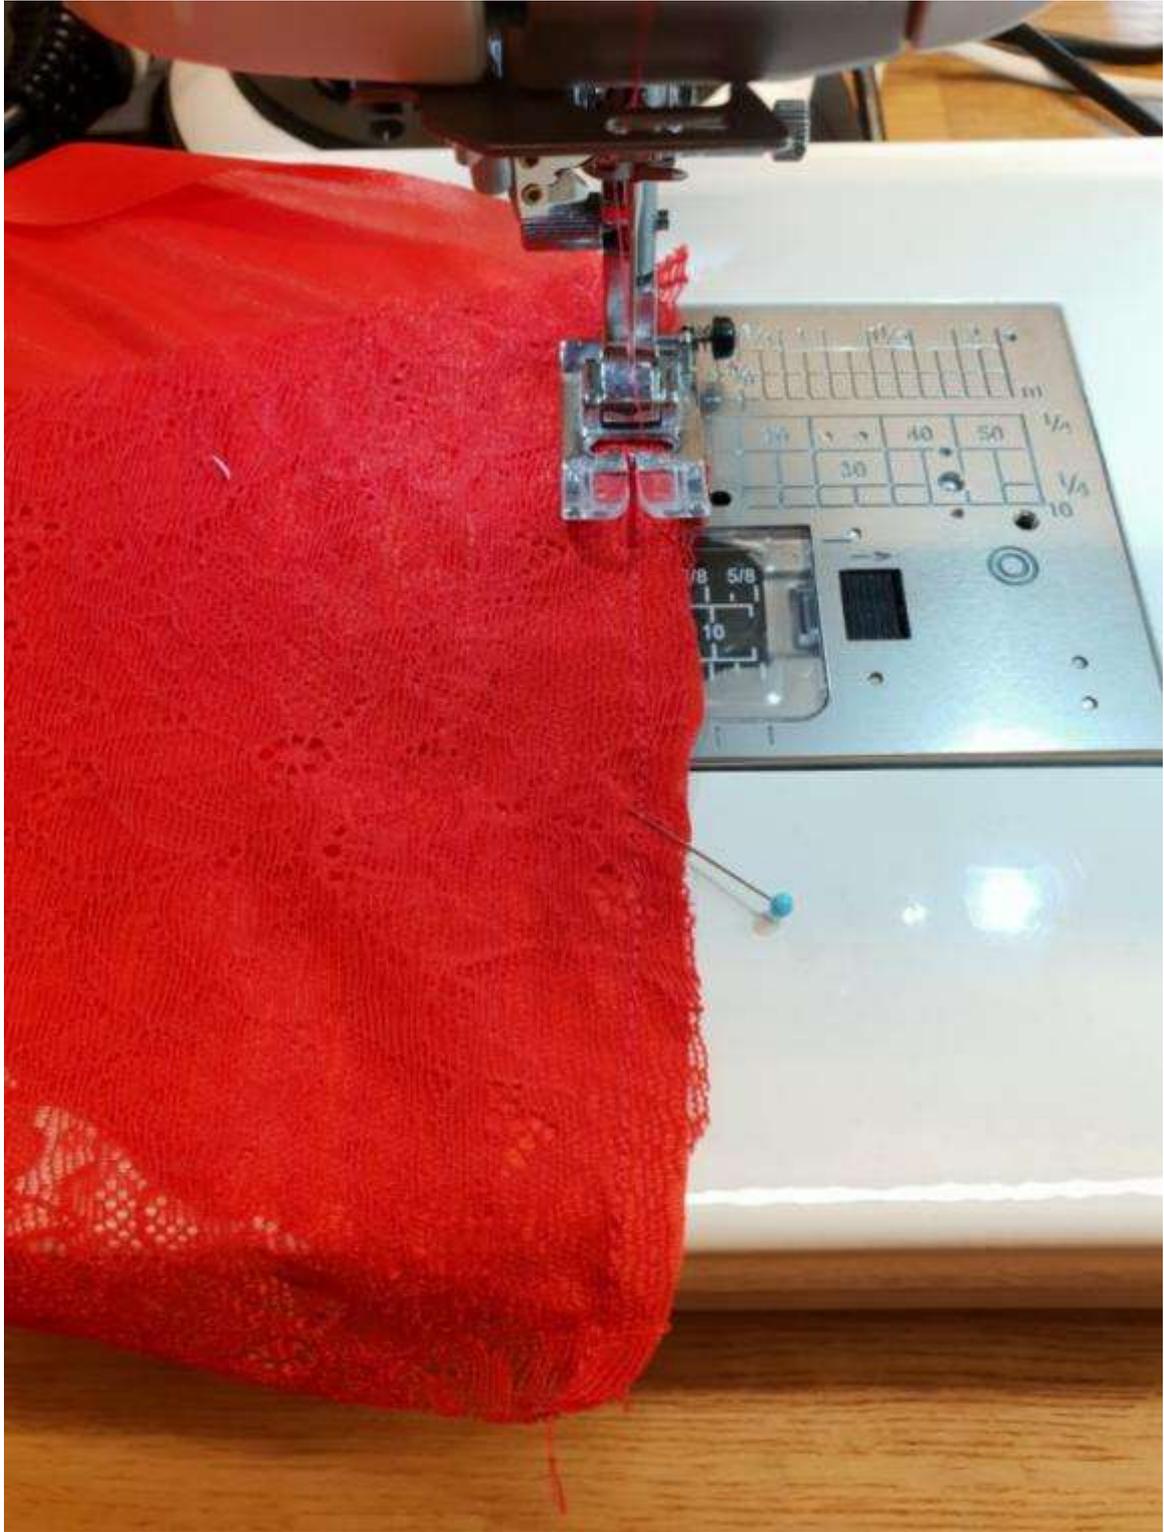

Sew the lace around the edge.

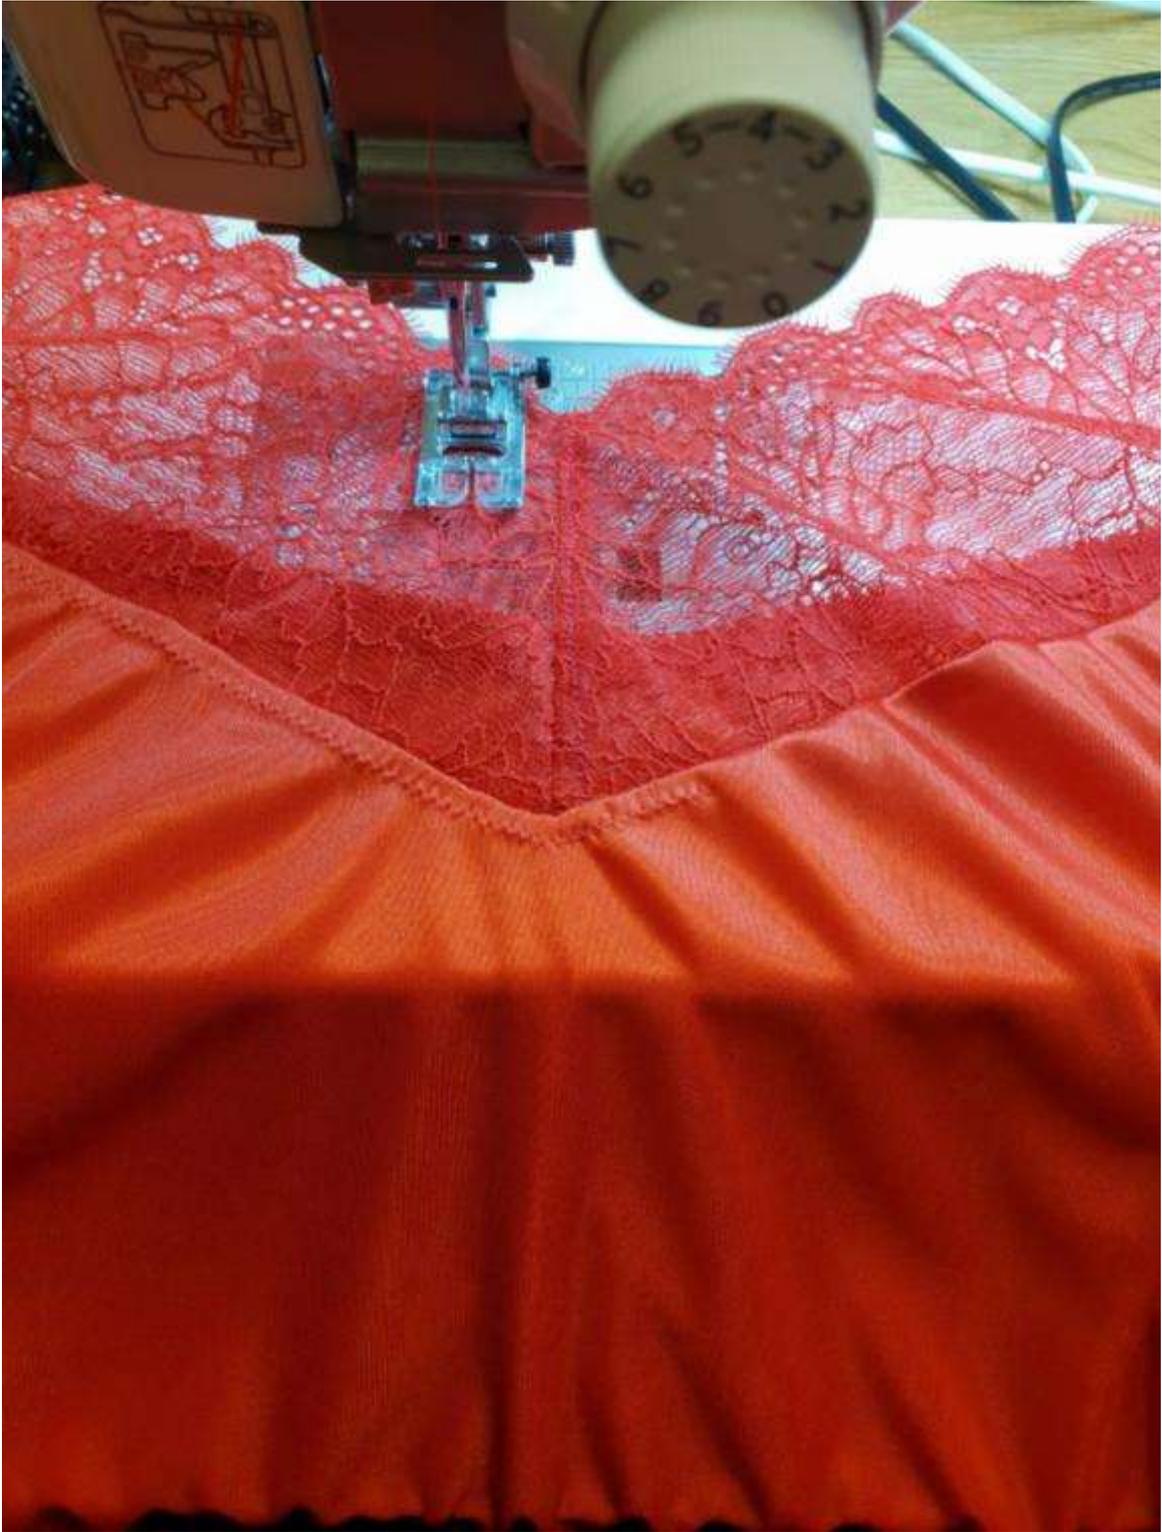

Sew decorative stitches in the seam between the fabrics.

panties

SEAM ALLOWANCE/HEM NOT INCLUDED.

Choose your body length on the pattern.

* some details are not included in the pattern



Place the front piece right sides together and stitch the crotch seam.



Place the back piece right sides together and stitch the crotch seam.



Fold the fabric and make sure that the crotch seam fits. (Fabric right to right) Sew the inner leg seam together.

Sew a crotch piece in the hem of the legs.

Add the elastics edge to edge with the waist-WS and sew around.

Fold in the elastic once so that it is completely covered. Measure inward so it is about 4cm (8cm hem included). Sew on the elastic.

Hem the legs. Done!